



Lumina I



High Power Output

Solarspace efficient cells with MBB and high-density encapsulation ensures higher power output



High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



More Power Generation

Gallium doped wafers reduce annual power degradation, optimized circuit design ensures more power generation under shading



Great Adaptability

Sensible dimension design suitable for all scenarios

SolarSpace Technology Co., Ltd. was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 58.75GW+ capacity of solar cell and 5.7GW capacity of solar module in China and overseas.

*Please refer to SolarSpace for details

SS8-72HS

540-560M


Mono-Facial Module

560W

Maximum Power Output

21.68%

Maximum Module Efficiency

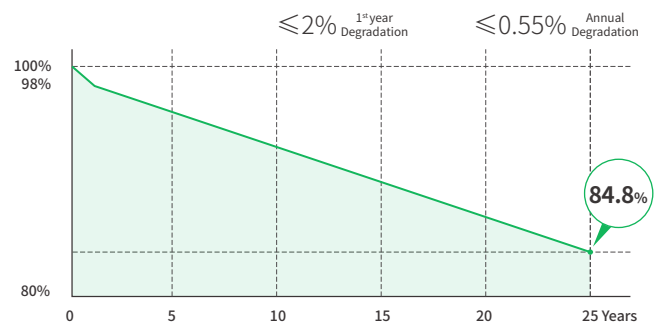

12 Years Product Warranty **25** Years Linear Power Warranty

Comprehensive Certificates

- IEC61215 • IEC61730
- IEC61701: Salt mist corrosion test • IEC62716: Ammonia corrosion test
- IEC60068: Dust and Sand test
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



Electric Characteristics (STC)

Module Type	SS8-72HS -540M	SS8-72HS -545M	SS8-72HS -550M	SS8-72HS -555M	SS8-72HS -560M
Maximum Power (Pmax) [W]	540	545	550	555	560
Open-Circuit Voltage (Voc)[V]	49.61	49.76	49.91	50.03	50.15
Maximum Power Voltage (Vmp) [V]	41.65	41.81	41.97	42.15	42.33
Short-Circuit Current (Isc)[A]	13.85	13.92	14.02	14.07	14.14
Maximum Power Current (Imp) [A]	12.97	13.04	13.10	13.17	13.23
Module Efficiency	20.90%	21.10%	21.29%	21.48%	21.68%

Irradiation 1000W/m², Cell Temperature 25°C, AM=1.5

Temperature coefficients


Temperature coefficient of Isc	+0.045%/°C
Temperature coefficient of Voc	-0.265%/°C
Temperature coefficient of Pmax	-0.335%/°C
NMOT	45±2°C

Electric Characteristics (NMOT)

Module Type	SS8-72HS -540M	SS8-72HS -545M	SS8-72HS -550M	SS8-72HS -555M	SS8-72HS -560M
Maximum Power (Pmax) [W]	408	412	416	420	424
Open-Circuit Voltage (Voc)[V]	46.43	46.55	46.68	46.84	46.98
Maximum Power Voltage (Vmp) [V]	39.00	39.21	39.44	39.67	39.89
Short-Circuit Current (Isc)[A]	11.10	11.13	11.18	11.22	11.27
Maximum Power Current (Imp) [A]	10.47	10.51	10.55	10.59	10.63

Irradiance 800 W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s, AM=1.5

Engineering Design

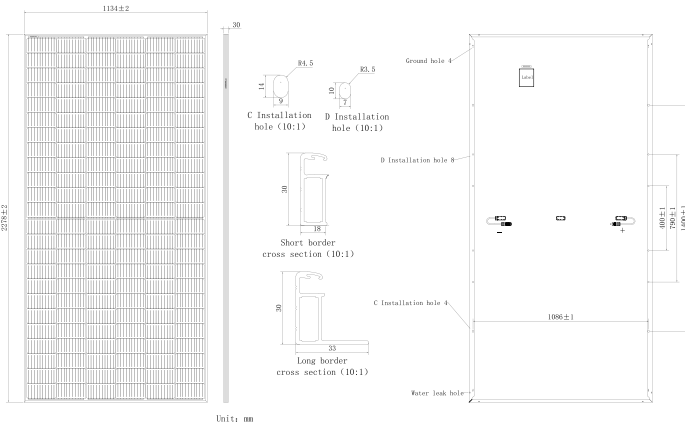


Mechanical Characteristics

Cell Type	Mono PERC (M10)
Number of Cells	144(6x24)
Dimensions	2278X1134X30mm
Weight	27.5kg
Glass	Single glass, 3.2mm coated tempered glass
Frame	Anodized Aluminum Alloy
Output Cables	4mm ² (IEC),12AWG(UL) 300mm (including connector)
Junction Box	IP68 Rated, 3 diodes
Connector	MC4-EVO2 or MC4 Compatible
Packaging	36 Pieces/Pallet, 720 pieces/40' container


Frame color and cable length are subject to the actual order

Characteristics

I-V/P-V Curve at Different Irradiation
SS8-72HS -550M



I-V Curve at Different Temperature
SS8-72HS -550M



Operating Conditions

Maximum System Voltage	1500V DC
Power Tolerance	0~+3%
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	25A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa

